


FIBRANprofiles MONTANTI

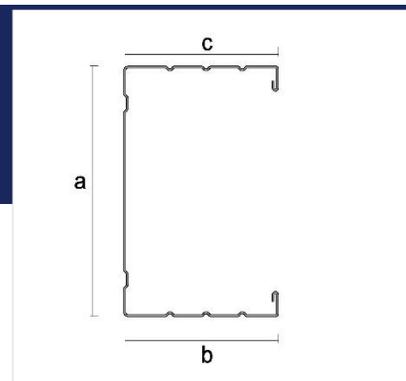

Product Description

FIBRANprofiles C stud are cold roll formed from galvanized lightweight steel DX51D+Z for use in non-load-bearing partition system according to EN 10327.

Structural apertures are spaced along the spine of the C stud, providing easy routing of services through a partition. CE marking according to EN14195.

Applications

Suitable for non-load-bearing partition systems and linings

Features	U. M.	Value	Standard
Reaction to fire	Class	A1	EN 14195
Gage	mm	0,6	EN 10143
Protective coating	-	Z140	EN 10327

Type	a [mm]	b [mm]	c [mm]	Length [mm]	CE
Montante 50	47	49	50	3000-3500-4000	M47/49/50
Montante 75	47	74	50	3000-3500-4000	M47/74/50
Montante 100	47	99	50	3000-4000	M47/99/50
Montante 150	47	149	50	3000-4000	M47/149/50

Material available in thickness 8/10 e 10/10mm.

FIBRAN reserves the right to alter or amend product specifications without notice. The information included in this publication is correct to the best of our knowledge at the time of printing. Whilst FIBRAN will endeavor to ensure publications are up to date, it is the user's responsibility to check with the company the validity of the information prior to materials' use. For more information visit the web site www.fibran.it.

Date 31/07/2018

FIBRAN S.p.A. via Fiasella 5/11 16121 GENOVA Italy - ph. +39 010 25466.1 fax +39 010 25466.949 - www.fibran.it - tech@fibran.it