


FIBRANgyps H2

Plasterboard for interior use



Datasheet

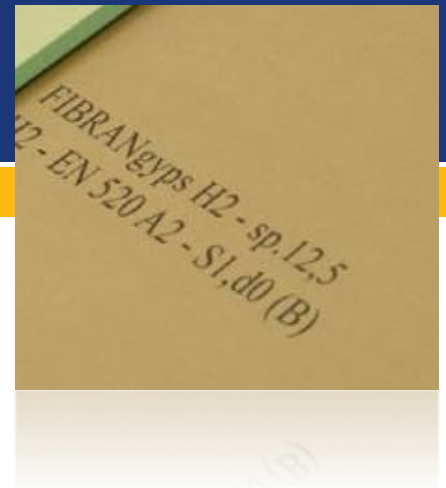

Description

FIBRANgyps H2 type H2 coated gypsum board, additivated to reduce water absorption, CE marked in accordance with EN 520. It does not emit pollutants - it has been awarded the A+ classification according to EN ISO 16000-09 and has passed the Eurofins **Indoor Air Confort Gold test**.

Identified by the green colour of the visible face. Available in the version:

- BA13 nominal thickness 12.5 mm

Fields of application

Suitable for interior walls, counter walls, false ceilings in wet areas such as kitchens, bathrooms, pilotis and porches.



Features	U. M.	Value	Standard
Edge	-	BA tapered edge	EN 520
Width	mm	1200	EN 520
Thermal conductivity (at 10°C)	W/mK	$\lambda_D = 0,21$ theoretical value	EN 10456
Reaction to fire	Class	A2-s1,d0	EN 520
Specific Heat Capacity	kJ/kg K	$c_p = 1,0$ theoretical value	EN 10456
Water vapor resistance factor	-	$\mu = 10$ theoretical value	EN 10456
Total water absorption	%	< 10	EN 520
Surface water absorption	g/m ²	< 220	EN 520

Type	Thickness [mm]	Weight [kg/m ²]	Length [m]	Flex. long. [N]	Flex. trasv. [N]
BA13	12,5	8,5	2,0 - 2,5 - 3,0	≥ 550	≥ 210

Marking on the rear face:

FIBRANgyps H2 / 12.5 mm thick / CE / H2 / EN 520 / A2-s1,d0(B) / A+.

Date, time of manufacture and D.o.P. number.

FIBRAN S.p.A. reserves the right to modify or change the technical data given without prior notice. It is the customer's responsibility to check that the technical information is suitable for the specific intended use. For further technical information please consult www.fibran.it or the Technical Department by writing to tech@fibran.it.